



## Busbar 600 A with cover

[www.victronenergy.com](http://www.victronenergy.com)

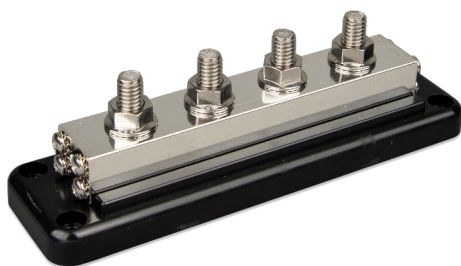


**Busbar 600 A with 4 high current terminals and 8 low current screw terminals, without cover**

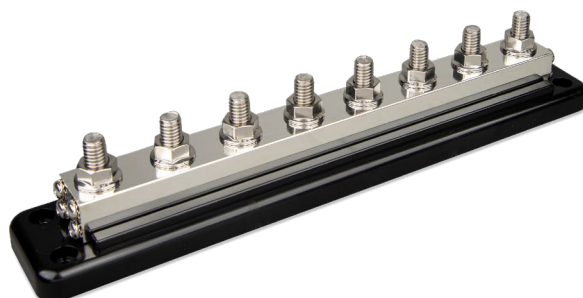

**Busbar 600 A with 8 high current terminals and 8 low current screw terminals, without cover**

| Busbar 600 A with cover                |                                           |
|----------------------------------------|-------------------------------------------|
| Max. current                           | 600 A                                     |
| Max. Voltage                           | 70 VDC                                    |
| Terminal diameter                      | 3/8 inch / 9.53 mm                        |
| Terminal height                        | 0.76 inch / 19 mm                         |
| Terminal material                      | Stainless steel                           |
| Flange nut material                    | Stainless steel                           |
| Recommended torque                     | 180 lbf-inch / 20 N·m                     |
| Screw terminals                        | diameter #8 (0.164 inch) / 4.2 mm         |
| Screw material                         | Stainless steel                           |
| Recommended torque                     | 17 lbf-inch / 2 N·m                       |
| Busbar material                        | Tin-plated copper (19 x 24 mm)            |
| Base material                          | ABS, black, UL 94 V-0                     |
| Cover material                         | ABS, black, UL 94 V-2                     |
| Weight, 4 terminals                    | 1.7 lb / 0.75 kg                          |
| Dimensions (h x w x d)<br>(with cover) | 2.6 x 8.5 x 3.4 inch<br>65 x 216 x 86 mm  |
| Weight, 8 terminals                    | 2.9 lb / 1.3 kg                           |
| Dimensions (h x w x d)<br>(with cover) | 2.6 x 12.9 x 3.4 inch<br>65 x 327 x 86 mm |

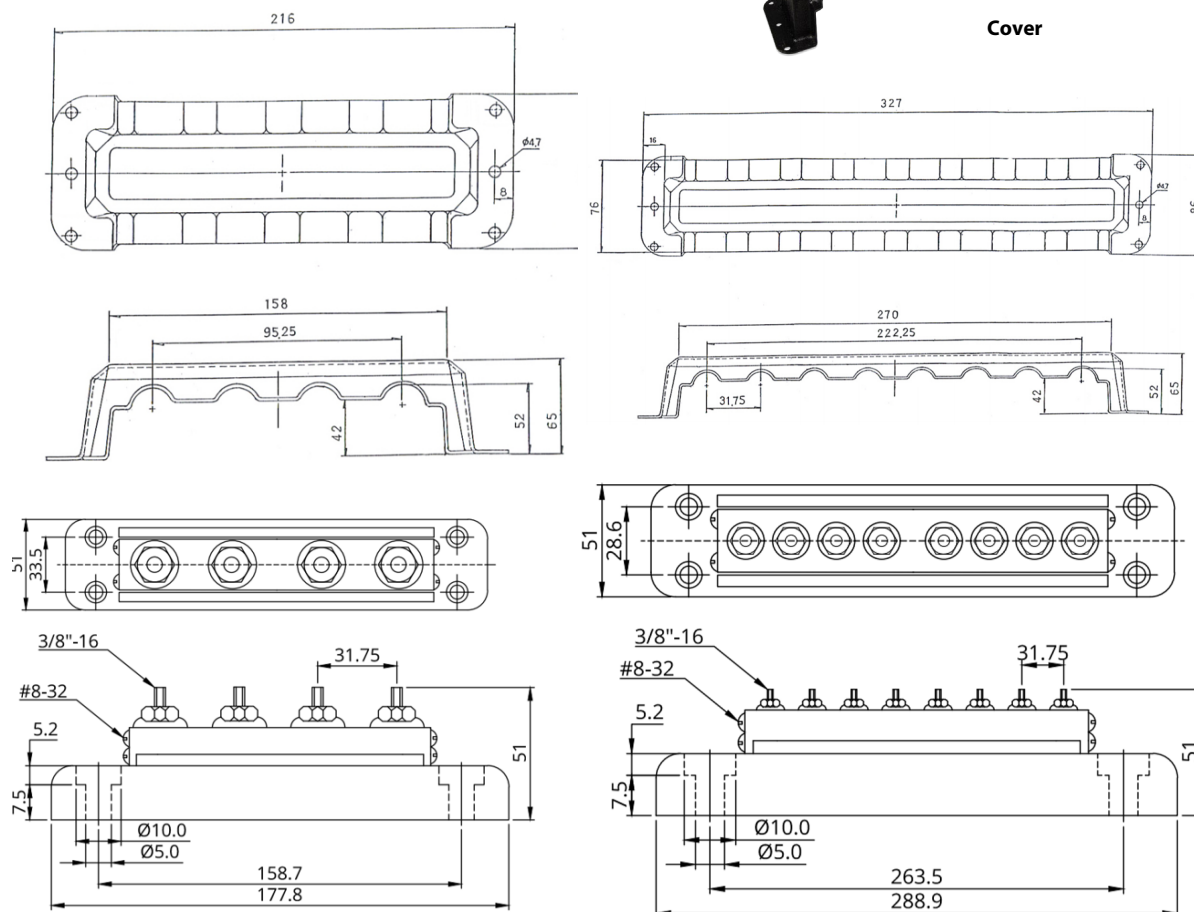

Drawings are not to scale