3MP Indoor Fixed-focal Wi-Fi Pan & Tilt Network Camera

DH-H3B



Series Overview

Dahua Wireless series cameras are not only easy to install and operate, but also perform outstandingly and cost-effective. They provide full coverage of a scene with 3MP resolution, 0° to 350° pan and-5°to 80° tilt. Their powerful functions, such as one-click proactive call, preset petrol, AI human detection & pet detection, and auto tracking, assist with the accurate detection and continuous tracking of targets. Information is also synchronously sent to your phone to keep you up-to-date. These cameras are widely used in small and medium-sized scenes such as small-sized retail stores.

3MP
Clear images with sharp details

Day&Night
Clear images even at night

One Camera for 360° View
360° monitoring without blind spots

One-click Proactive Call
Proactive bidirectional call anytime, anywhere

AI Human Detection
Focuses on what matters and reduces false alarms

Pet Detection
Focuses on what matters and reduces false alarms

Preset Patrol
Guards the places that matter to you regularly

Auto Tracking
Automatic tracking of targets

One-click Privacy Mode
Protects your privacy


Abnormal Sound Alarm
Detects abnormal sounds and sends alarms in time

Wi-Fi 6
Seamless integration of speed and anti-interference

Bluetooth Pairing
Fast pairing with Bluetooth

H.265
Advanced H.265 compression technology

Supports Micro SD Card
Low-cost storage

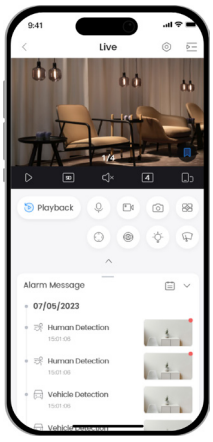


Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.

Available on the App Store

GET IT ON Google play

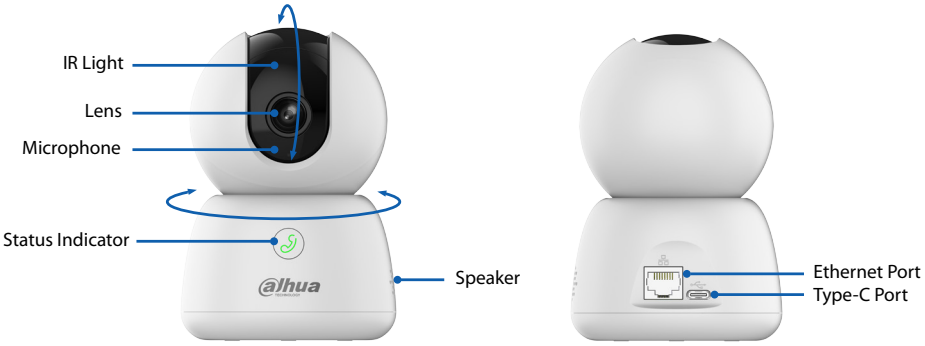

Specifications

Camera

3MP Indoor Fixed-focal Wi-Fi Pan & Tilt Network Camera	1/3.2" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Illumination Distance	Up to 10 m (32.81 ft) (IR)
Illuminator On/Off Control	Auto
Illuminator Number	1 (IR LED)
Angle Adjustment	Pan: 0° to 350° Tilt:-5° to 80°

Lens

Max. Aperture	F2.0
Field of View	2.8 mm: H: 99°; V: 55°; D: 117° 3.6 mm: H: 79°; V: 43°; D: 94°

Intelligence

Human Detection	Yes

Video

Video Compression	H.265
Video Frame Rate	Main stream: 2304 × 1296@(1-25/30 fps) sub stream: 640 × 360@(1-25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Resolution	3M (2304 × 1296); nHD (640 × 360)
Video Bit Rate	H.265: 40 kbps–4096 kbps
Day/Night	Auto(ICR)/Color/B/W
WDR	DWDR
Motion Detection	Yes
Image Rotation	0°/180°

Audio

Built-in MIC	Yes
Built-in Speaker	Yes
Audio Compression	G.711a

Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE 802.11b/g/n/ax 2.412-2.472 GHz, 2.4 G,≤20dBm@2400-2483.5MHz
Storage	Micro SD card (up to 256 GB)
Management Software	DMSS
Mobile Client	iOS;Android

Certification

Certifications	CE

Power

Power Supply	5 VDC, 1 A
Power Consumption	Basic: 1.6 W Max.: 3.8 W (live + IR + PT rotation)

Environment

Operating Temperature	–10 °C to +45 °C (+14 °F to + 113 °F)
Operating Humidity	≤95%

Structure

Casing Material	Plastic
Product Dimensions	ϕ84 mm × 123.8 mm (ϕ3.31" × 4.87")
Net Weight	206.5 g (0.46 lb)

What's in the box



× 1

Tools:
- Installation Position Map × 1
- Screw Package × 1
- Power Cord × 1

Documents:
- Bracket × 1
- Quick Start Guide × 1
- Legal and regulation information × 1

Power:
- QR Code × 1
- Power Adapter × 1



© 2024 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.