Bullet Network Camera

Application Quick Start Guide



ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD. V1.0.0

Table of Contents

1 Operating with DMSS 1
2 Installation 3
2.1 Packing List 3
2.2 Dimensions 3
2.3 Installing Camera 4
2.3.1 Installation Method 4
2.3.2 Installing SD Card 4
2.3.3 Attaching Camera 4
2.3.4 (Optional) Installing Waterproof Connector 6
2.3.5 Adjusting Lens Angle 6


1 Operating with DMSS

Make sure that there are no obstacles and electromagnetic interference between the device and the router for best possible wireless performance.

Step 1 Add the device.

1) Tap **+** button on the upper-right corner of the DMSS home page to scan the QR code on the camera. If your DMSS fails to scan the QR code, tap **Manually enter SN**.
2) Select **Wireless Camera**.

Figure 1-1 Add the device

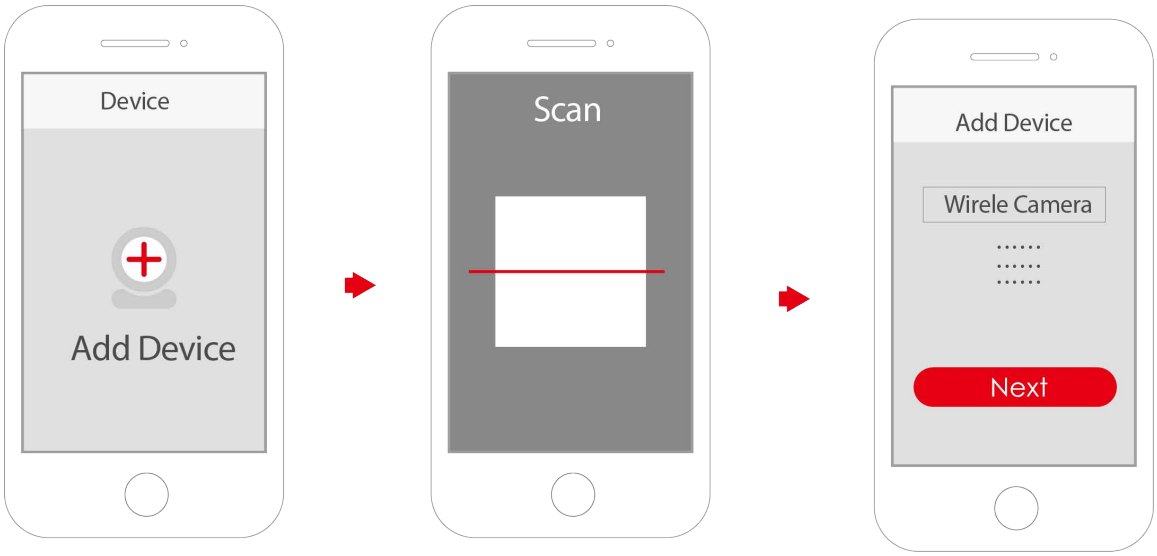

Step 2 Configure the device hotspot.

If you connect the device with Ethernet cable, please jump to Step4 directly.

1) Make sure that the device is connect to power and enable device hotspot, and then click **Next**.
2) Go to Wi-Fi settings of your mobile phone, connect hotspot named DAP-xxxxxxxx.
3) Create the username and password for the device and then tap **Next**.

Figure 1-2 Configure the device hotspot



Step 3 Configure the Wi-Fi.

Select your Wi-Fi network from SSID list and then enter the password.

Step 4 Configure the device information.

1) Create the device name and password.
2) Set the time zone and then click **Done**.

Figure 1-3 Configure the device information




2 Installation

2.1 Packing List


- The tool required for the installation such as electric drill is not provided in the package.
- The operation manual and related tool information are contained in the disk or the QR code.

Figure 2-1 Dimensions (mm [inch])

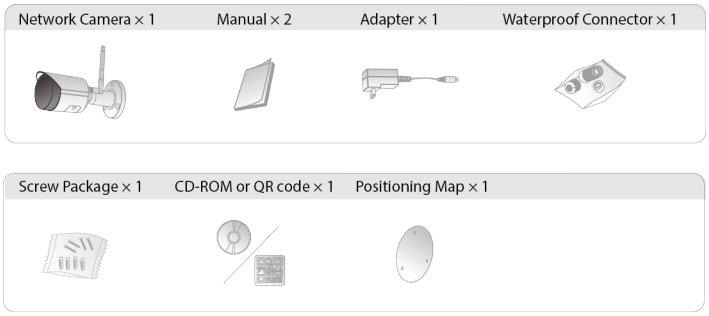

2.2 Dimensions


Figure 2-2 Dimensions (mm [inch])

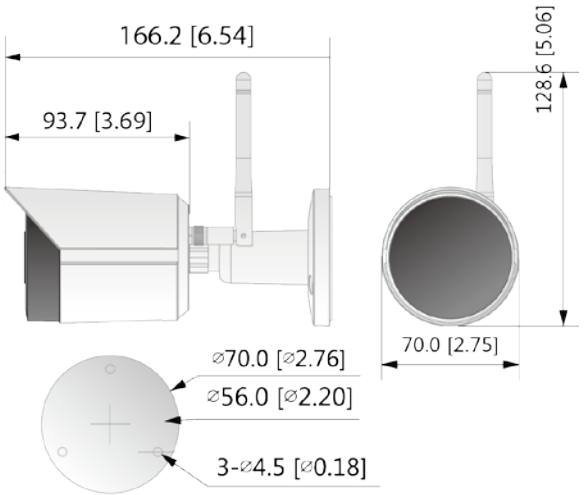

2.3 Installing Camera

2.3.1 Installation Method

Figure 2-3 Installation method

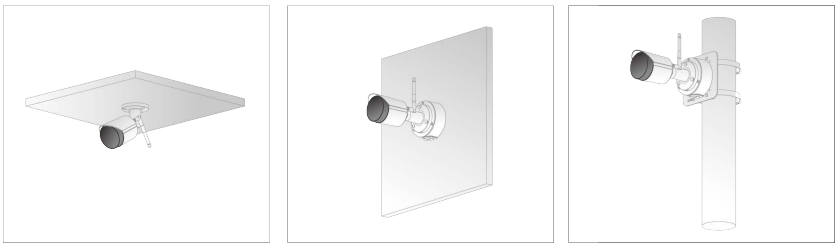


2.3.2 Installing SD Card

- SD card slot is available on select models.
- Disconnect the power before installing or removing the SD card.

Press the reset button for 10 seconds to reset the device.

Figure 2-4 Install SD card

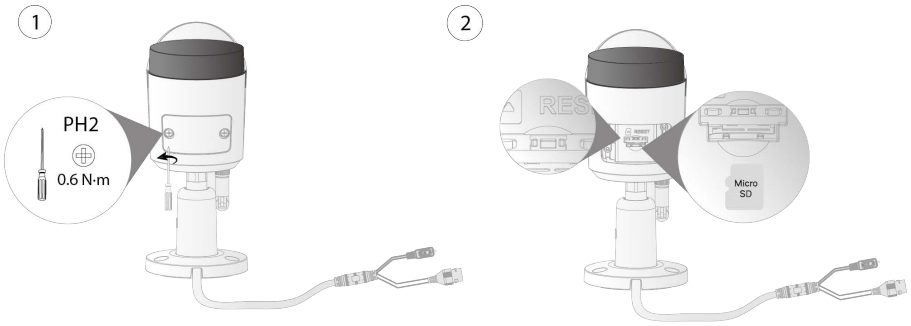

2.3.3 Attaching Camera

- Make sure that the mounting surface is strong enough to hold at least three times the weight of the camera and bracket.
- Remove the protective film after finishing installation.

Figure 2-5 Cable going through the side cable tray


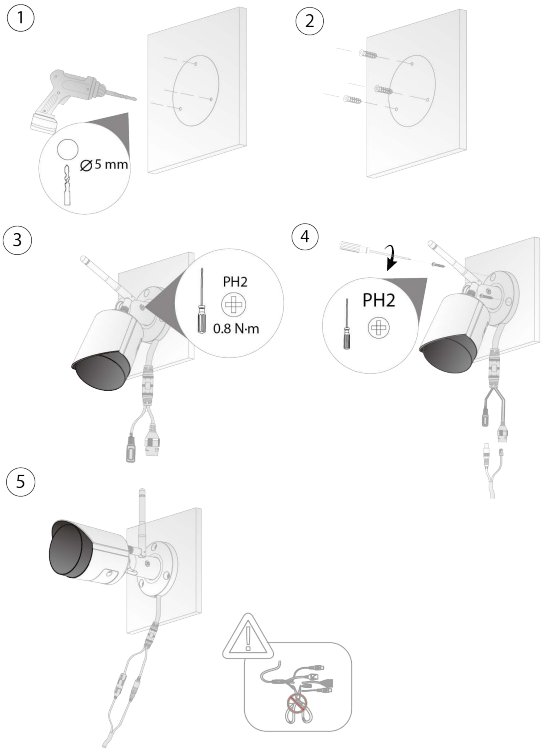



Figure 2-6 Cable going through the mounting surface

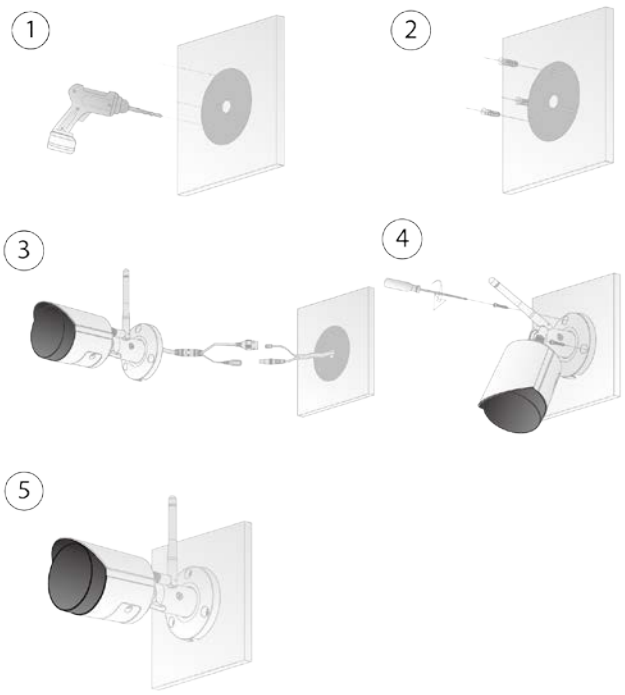

2.3.4 (Optional) Installing Waterproof Connector


This part is needed only when a waterproof connector comes with the camera and the camera is used outdoors.

Figure 2-7 Install waterproof connector

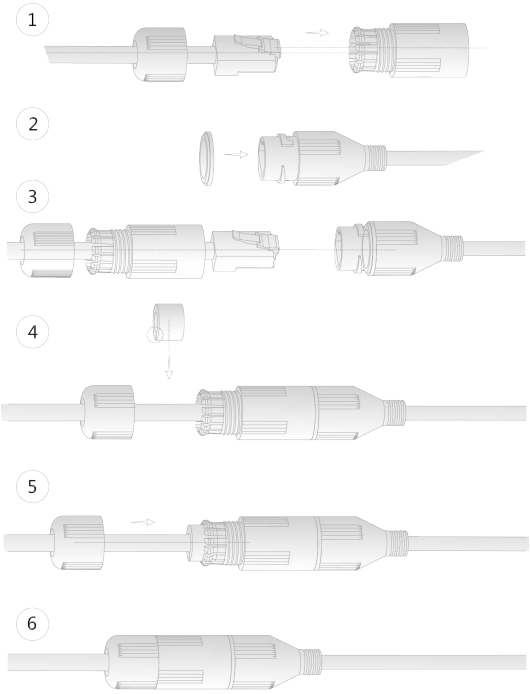

2.3.5 Adjusting Lens Angle

Figure 2-8 Adjust lens angle

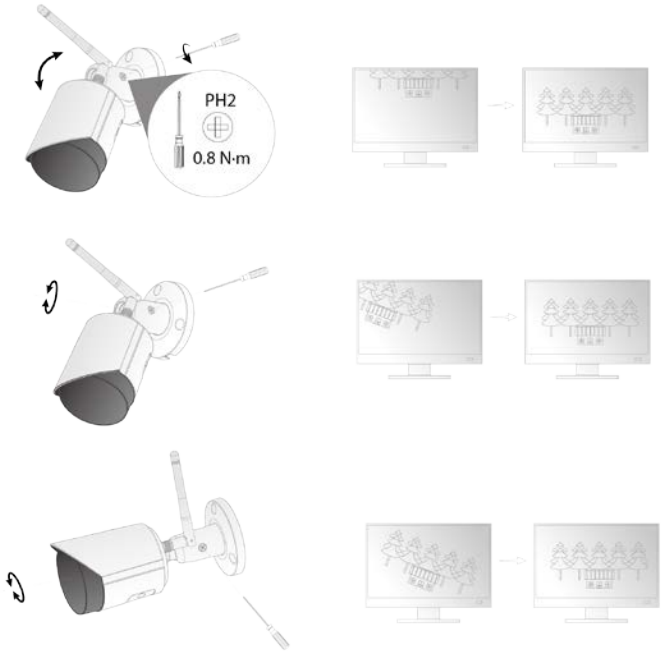

ENABLING A SAFER SOCIETY AND SMARTER LIVING

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.
Address: No.1199 Bin'an Road, Binjiang District, Hangzhou, P. R. China | Website: www.dahuasecurity.com | Postcode: 310053
Email: overseas@dahuatech.com | Fax: +86-571-87688815 | Tel: +86-571-87688883