DH-PFB5202C

In-ceiling Mount Bracket



- Supports in-ceiling mount installation and is applicable to large-size dome cameras.
- Easy to install and aesthetically pleasing.
- Designed for easy disassembly and maintenance.



Scene

Ideal for mounting cameras, it works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with relative humidity of less than 90%.

Technical Specification


Structure

Product Material	SECC, PC
Product Dimensions	Φ211.5 mm × 109.7 mm (Φ8.33" × 4.32")
Appearance Color	White
Net Weight	0.55 kg (1.21 lb)
Gross Weight	0.83 kg (1.83 lb)
Load Bearing	3.0 kg (6.61 lb)
Installation	In-ceiling Mount
Rotation Angle	Pan: 0° to 360°
Applicable Model	Please see "Camera Accessories Selection"
Packaging Dimensions	266.0 mm × 266.0 mm × 138.0 mm (10.47" × 10.47" × 5.43") (L × W × H)
Transport Package Dimensions	719.0 mm × 553.0 mm × 298.0 mm (28.31" × 21.77" × 11.73") (L × W × H)
Packaging Method	10 pcs in each carton


Environment

Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–90% (RH)

Installation

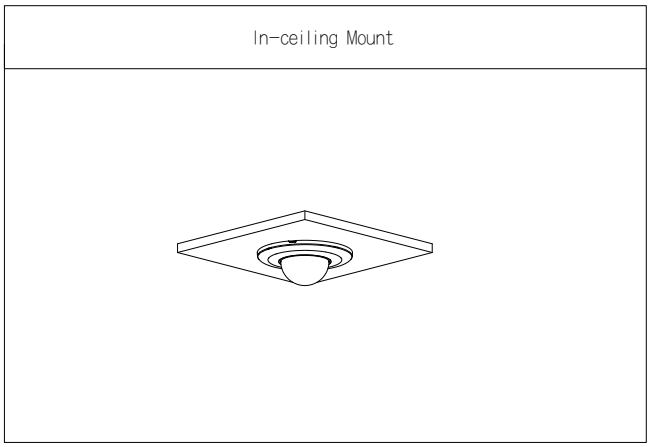

Dimensions (mm[inch])

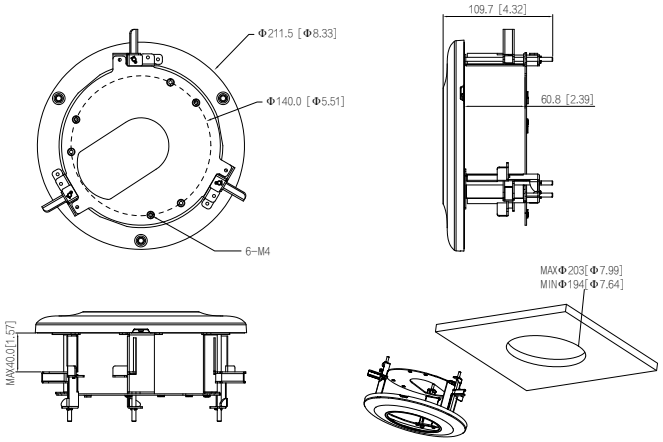

Package Information

- In-ceiling mount bracket × 1
- Installation Guide × 1
- M4×14 screw × 3
- S3.0 wrench × 1

Rev 002.000 © 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.