DH-PFA150-B

Pole Mount Bracket



- Built of SECC and SUS304 material.
- Compatible with junction boxes, wall mount brackets, power boxes, universal joints, and more.
- Designed for multiple types of poles that are 80-150 mm wide.



Series Overview

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, it works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with relative humidity of less than 90%.

Technical Specification

Structure

Product Material	SECC; Hoop: SUS304
Product Dimensions	130.4 mm × 45.0 mm × 170.0 mm (5.13" × 1.77" × 6.69") (L × W × H)
Appearance Color	Black
Net Weight	1.09 kg (2.40 lb)
Gross Weight	1.28 kg (2.82 lb)
Load bearing	7.0 kg (15.43 lb)
Installation	Pole mount
Pole Diameter	Φ80 mm–150 mm (Φ3.15"–5.91")
Packaging Dimensions	177.0 mm × 177.0 mm × 52.0 mm (6.97" × 6.97" × 2.05") (L × W × H)
Applicable Camera	Please see "Camera Accessories Selection"

Environment


Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection

Ordering Information


Type	Model	Description
Camera Mount	DH-PFA150-B	Pole Mount Bracket

Installation

Pole Mount(Vertical)



Dimensions (mm[inch])

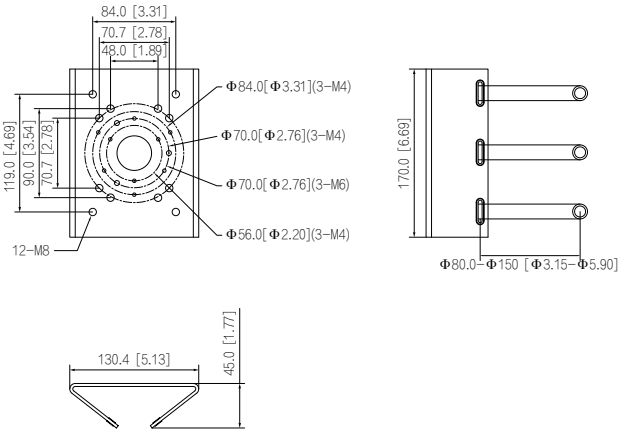

Package Information

- Pole mount bracket × 1
- M6×14 screw × 3
- M8×25 screw × 4
- S5.0 wrench × 1
- S6.0 wrench × 1
- 80–150mm metal hoop × 3

Rev 002.000 © 2024 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.