DH-PFB220C-B

Ceiling Mount Bracket



· Built of aluminum alloy.
· Suitable for a variety of cameras and is elegant.
· Standard ports that work with the adapter plate to facilitate the installation of eyeball cameras and small domes.



Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, it works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with relative humidity of less than 90%.

Technical Specification

Structure

Casing Material	Aluminum alloy
Product Dimensions	Φ128.8 mm × 767.0 mm (Φ5.07" × 30.2")
Appearance Color	Black
Net Weight	0.92 kg (2.03 lb)
Gross Weight	1.35 kg (2.98 lb)
Load bearing	2.0 kg (4.41 lb)
Installation	Ceiling mount
Packaging Dimensions	825 mm × 185 mm × 172 mm (32.48" × 7.28" ×6.77") (L × W × H)
Applicable Model	Please see "Camera Accessories Selection"


Environment

Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection


Ordering Information

Type	Model	Description
Camera Mount	DH-PFB220C-B	Ceiling Mount Bracket

Installation

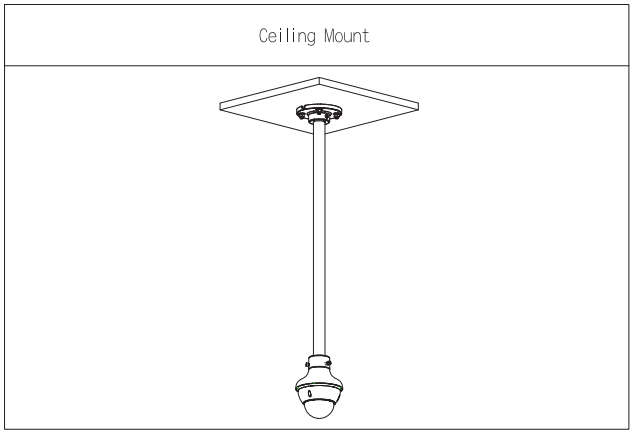

Dimensions (mm[inch])

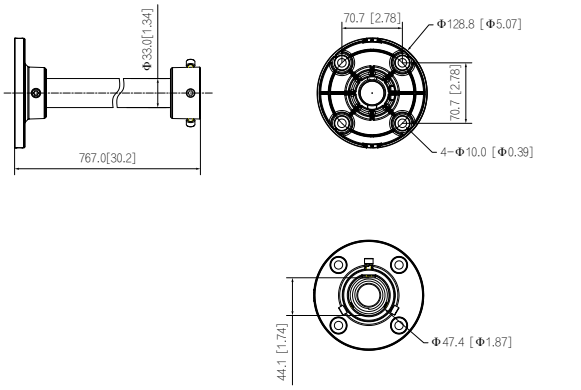

Package Information

- Ceiling mount bracket × 1
- S5.0 wrench × 1

Rev 002.000 © 2025 Dahua. All rights reserved. Design and specifications are subject to change without notice.
The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.