

DS-KH7300EY-WTE2/White 2-wire HD Indoor Station



- Excellent Product Design: 7-inch touch screen with 1024*600 high resolution
- Excellent Product Design: 3 touch buttons, physically challenged friendly
- Easy to Use: DEC knobs configuration;
- Easy to Use: Plug & play, support different connection topologies
- Easy to Use: Supports Hik-Connect App (model with W)
- Easy to Use: Multiple indicators--Wi-Fi, power, mute, in use
- Easy to Use: Max. 4 custom virtual buttons
- View live view of door stations
- Support Professional Studio / Trade button function (Open doors automatically)
- Support Floor Call

▪ Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
FOV	/
WDR	/
Resolution	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U G.711 A
Audio input	1 Built-in omnidirectional microphone
Audio output	1 Built-in loudspeaker
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200 captured pictures (with TF card)
Linked indoor extensions capacity	3
Network parameters	
Communication protocol	TCP/IP, RTSP
Wi-Fi standard	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	1
TAMPER	/
RS-485	/
USB	/
TF card	Max to 128 G, SD 2.0 or lower version
Alarm output	/
DIP switch	5 decimal DIP switch and 4 binary DIP switch
Power supply input	48V, powered by DS-KAD7060EY or DS-KAD7061EY
Two-wire IP interface	2, 1 for input 1 for output



No.555 Qianmo Road, Binjiang District,
Hangzhou 310031, China
T: 86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision_HQ



Hikvision



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

General	
Button	3 Touch buttons (Answer, Unlock, Hang up)+1 Physical button (Reset)
Installation	Surface mounting
Indicator	4 (Wifi、Power、Mute、In use)
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimensions	190.2 mm × 138.2 mm × 20 mm (7.5" × 5.4" × 0.8")
Battery	/
Power supply	48V, Powered by DS-KAD7060EY or DS-KAD7061EY
Application environment	Indoor
Power consumption	≤ 5 W
Language	English, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Spanish, Romanian, Estonian, Croatian, Slovenian, Serbian, Ukrainian, Portuguese

▪ Available Model

DS-KH7300EY-WTE2/White

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global




Hikvision
Corporate Channel



hikvisionhq

▪ Dimension

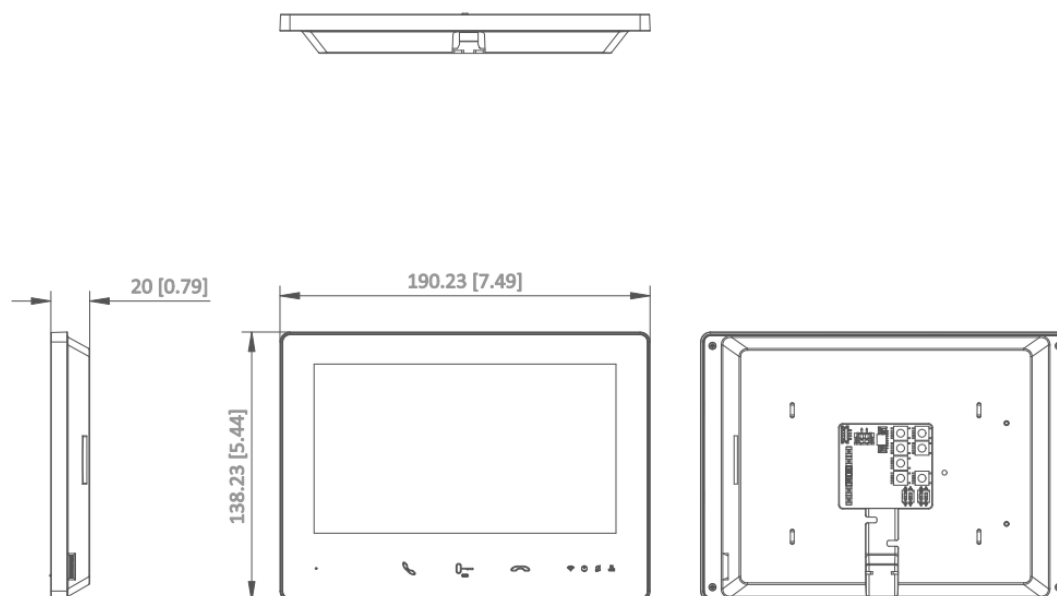

Unit:mm [inch]

SCALE	1:1
-------	-----

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

