

Thank you for purchasing our equipment. Please read this manual carefully and heed the safety warnings and instructions before installing, using or repairing the equipment. This will ensure not only the protection of persons, but also the long life of the equipment.


TECHNICAL PARAMETERS

Luminous flux	120lm
Chromaticity temperature	3000K, 5000K, RGB
Batteries	Li-Ion 3,7V 1200mAh
Battery life (min./max.)	4/8 h.
Charging duration	3 h
Power	USB-C
Dimensions	73 x 38 mm


GENERAL INFORMATION AND WARNINGS

- The magnetic swivel joint allows convenient rotation and removal of the device from the mounting base.
- 360° rotation.
- Control by remote control or by touch button.
- The device contains a non-removable battery.
- Do not expose the device to high temperatures or fire.
- Do not disassemble or repair the equipment. If the equipment is damaged, do not use it!

DESCRIPTION OF EQUIPMENT

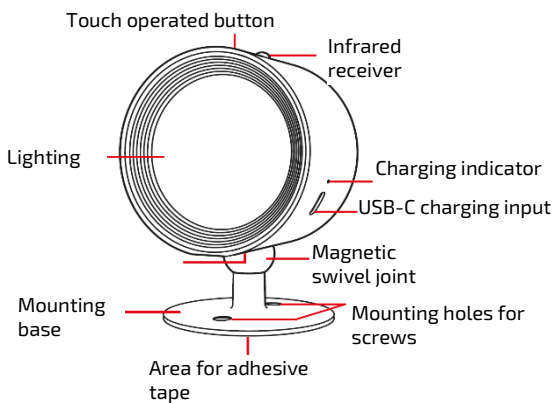


DESCRIPTION OF THE CONTROLLER

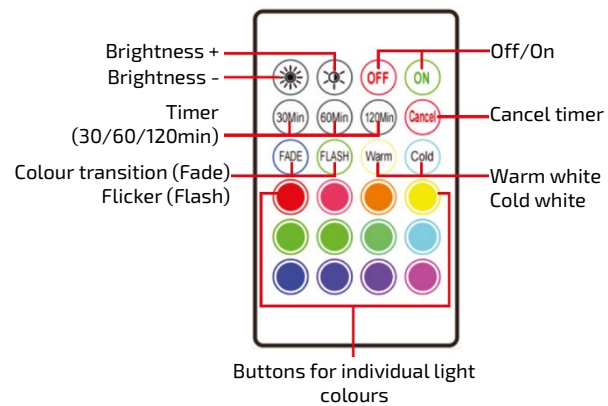


CHARGE

Plug the USB-C cable into the charging port.



Then connect the other end of the USB cable to the power adapter (not included)



The indicator will be red when charging. When fully charged, it will glow green.

TOUCH BUTTON CONTROL

- 2x quick press: switch on/off the device
- Press and hold: decrease and increase the brightness of the light
- Press the button to switch the light mode:
1. Warm white; 2. Cool white; 3. Red; 4. Green; 5. Blue; 6. Color transition; 7. Flicker

The light source of this luminaire is non-replaceable, at the end of its service life the entire luminaire must be replaced and disposed of in a designated place. This product contains a light source that for design reasons cannot be removed for verification and therefore the entire product is considered a light source.

The product has been issued with a CE declaration of conformity in accordance with the applicable regulations. On request from the manufacturer: info@solight.cz, or downloadable from www.solight.cz/en.

