



SELV CE IP68

## TLG-12E30C

INPUT 90~264VAC

OUTPUT 12VDC 2.5A 30W

### Features:

- Slimline design with fully sealed aluminum housing
- Waterproof IP68,suitable for any Working Environment
- With the newest topological structure,efficiency up to 85%
- Protections:Short circuit/OCP
- 100% full load burn-in test

### INPUT

INPUT VOLTAGE	90~264V AC (Refer to the derating curve of "Loading and Input voltage")
FREQUENCY RANGE	50/60Hz
EFFICIENCY(TYP)	85%
AC CURRENT	≤ 0.70A@115VAC ≤ 0.35A@230VAC
AC INRUSH CURRENT	60A@230VAC
LEAKAGE CURRENT	0.5mA/230VAC


### PROTECTION

OVER CURRENT LOAD	95%-120% rated power, Protection Type:auto-recovery, after fault condition is removed
SHORT CIRCUIT	Protection Type:recovery automatically after fault condition is removed

### SAFETY & EMC

SAFETY STANDARDS	IEC61347 A1 +A13
EMC	EN 55015;EN 61547;EN 61000-3-3;
SURGE	L-N : 2KV ; L/N-FG : 4KV
WITHSTAND VOLTAGE	I/P-FG:3KV AC I/P-O/P:1.5KV AC
ISOLATION	I/P-O/P: > 100M Ohms/500VDC/25°C /75%RH

### LOADING AND AMBIENT TEMPERATURE

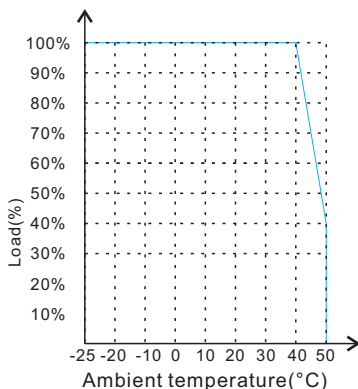

### INSTALLATION GUIDE

- It is recommended to use no more than 80% of the rated load of a power supply,to have tolerance for the power increase of LED modules or strips when their running temperature goes up.
- It is very important to have enough ventilation for a power supply to avoid overheating.
- Do not install the power supply in a closed place, or near flammable or explosive objects, or in a place easily flooded.
- Choose wires with correct AWG or copper area for electrical connection according to the rated current.

### OUTPUT

DC OUTPUT	12V
OUTPUT CURRENT	2.5A
RATED POWER	30W
VOLTAGE TOLERANCE	±5%
RIPPLE NOISE (MAX)	500mV P-P(Max.)
SETUP RISE TIME	≤1000mS(Max.)/230VAC


### ENVIRONMENT

OPERATING TEMPERATURE	-25°C~+50°C (Refer to the derating curve of "Loading and Ambient temperaturer")
OPERATING HUMIDITY	5%~95%
STORAGE TEMPERATURE	-35°C~+65°C

### WEIGHT & PACKING

MTBF	≥5475Khrs.MIL-HDBK-217F(25°C)
PRODUCT DIMENSION	190x35x18mm
NET WEIGHT	0.21KG
QUANTITY/CARTON	50PCS
PACKING DIMENSION	405x305x235mm
GROSS WEIGHT	12.2KG

### LOADING AND INPUT VOLTAGE

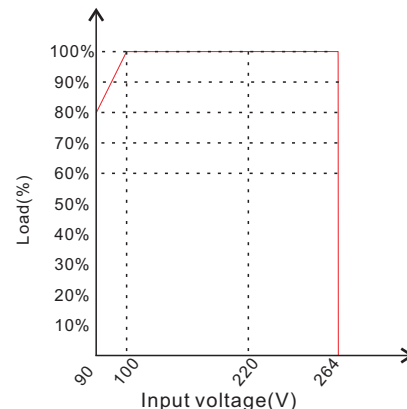

## OVERVIEW



## TOP VIEW




## FRONT VIEW




## BOTTEM VIEW




## AC INPUT CONNECTION

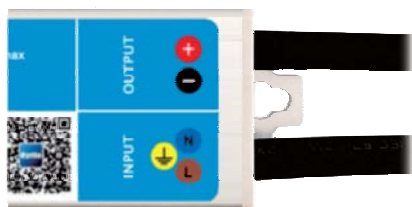

input terminal

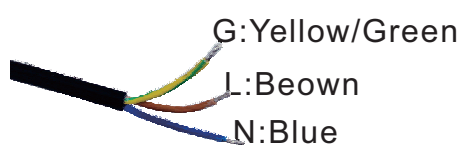


## DC OUTPUT CONNECTION

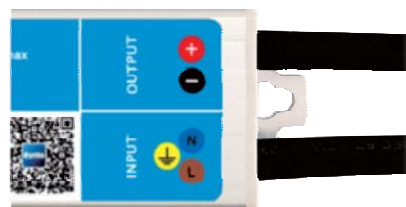

output terminal



## PRODUCT DIMENSIONS

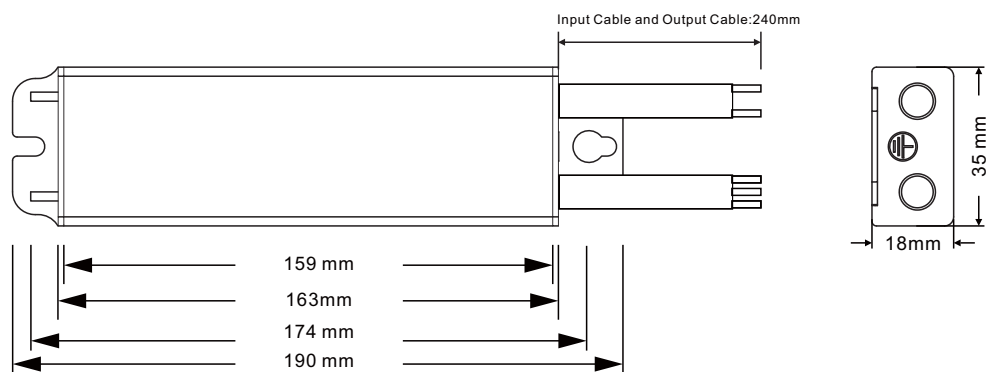

## INNER BOX



## OUTER CARTON

