
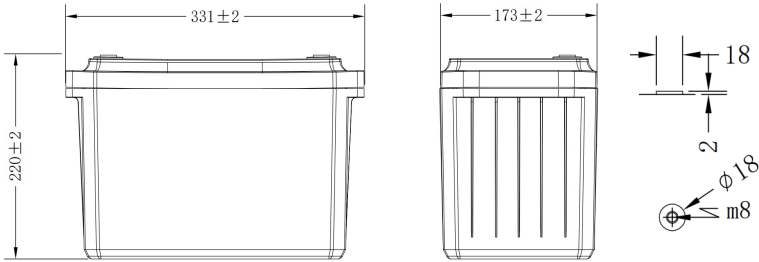




DIGITAL SCREEN INTELLIGENT STORAGE LITHIUM BATTERY

MODEL: PN MS125-12(L)

NO:

Container Color		Plane Chart:		
	PANTONE			
	 3516C			
	 Black C			
	Terminal type			LC4
	100 A			BMS
	20241023	Time		
<div>CE</div> <div>UN38.3</div>				
Function	(YES) Digital Display	(NO) Bluetooth	Product Size: 331*173*220mm	

Parameter Chart:

Rated Voltage	12.8	V
Rated Capacity(25°C)	125	Ah
Series & Parallels	4 ~ 1	S/P
Voltage Range	9.2 ~ 14.6	V
Rated Energy	1600	Wh
Maximum Discharge Current	100	A
Maximum Charge Current	100	A
Discharge cut-off voltage	≥ 9.2	V
Charge voltage	14.6	V
Cycle life(@25°C ,100%DOD)	≥ 3000	Cycle
Float Voltage	13.6 ~ 13.8	V
Operating humidity	60 ± 25%	R.H.
Certified	CE/UN38.3	
Communication	/	
Total Weight	Approx. 11.70 ± 0.50	Kg
Operating temperature	Charging 0 ~ 45°C Discharging -20 ~ 55°C	

Long-term Storage

After the battery is charged, it should be used as soon as possible to avoid loss of usable capacity due to self-discharge.

If storage is required, the battery needs to be stored in a low SOC state. The recommended storage conditions are: 20%~40%SOC, 0°C~35°C, relative humidity ≤60%.

Constant Current Discharge Characteristics (A, 25°C)

Time(h)	1.25	2.50	5.00	6.25	10.00	12.50	18.75	25.00
Current (A)	100.00	50.00	25.00	20.00	12.50	10.00	6.67	5.00

Constant Power Discharge Characteristics (Watt, 25°C)

Time(h)	1.25	2.50	5.00	6.25	10.00	12.50	18.75	25.00
Watt (W)	1280.00	640.00	320.00	256.00	160.00	128.00	85.33	64.00

Capacity Factors With Different Temperature

Discharge	-20	-10	0	10	20	25	30	40	50	55	60
	≥55	≥70	≥90	≥95	≥100	≥100	≥100	≥98	≥97	≥95	≥93

Matters needing attention


★ The above parameters are for reference only. The accurate parameters shall be based on the actual production order.

★ During usage, it is strictly prohibited to reverse the positive and negative terminals of the battery.


★ Please use a special charger for lithium-ion batteries when charging.

★ If series or parallel connection is required, please consult the agent or manufacturer.

Discharge Current 25°C

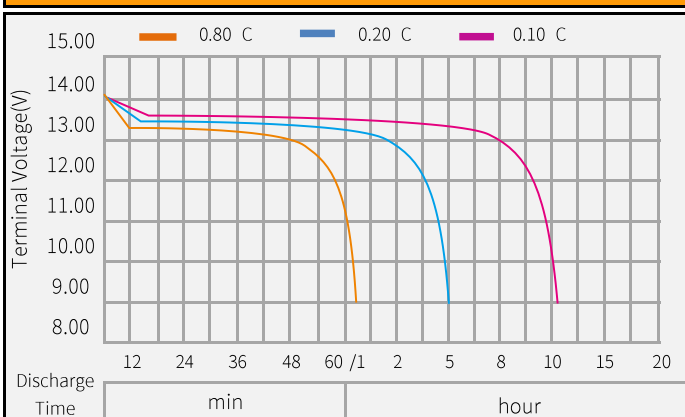

Cycle service life in relation to the depth of discharge

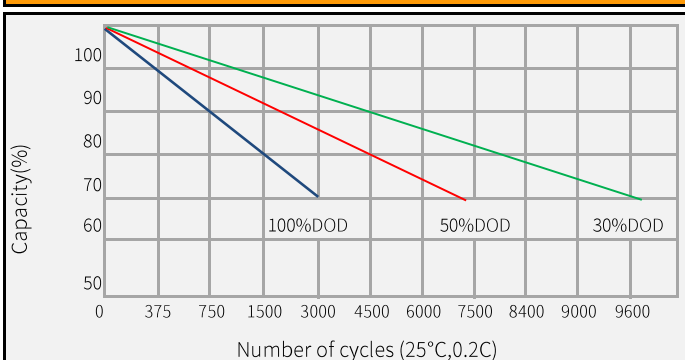

Charge and Discharge at 25°C, 0.2C

