

MOTORCYCLE BATTERY

MHP
OWER**AGM**

YT12A-BS [12V11Ah] 160A [EN]



Features

- Advanced sulfate-resistant technology.
- Advanced calcium lead alloy technology.
- Maintenance-free design.
- Factory activated, Ready to install and go!
- Absorbed Glass Mat (AGM) technology.

Performance Specifications

Nominal Voltage ----- 12 volts

Nominal Capacity 25°C (77°F)

20-hr. (0.525A to 10.5 volts) ----- 11.34AH

10-hr. (1.05A to 10.5 volts) ----- 10.5AH

5-hr. (2.1A to 10.2 volts) ----- 8.6AH

1C. (10.5A to 9.6 volts) ----- 4.7AH

3C. (31.5A to 9.6 volts) ----- 3.8AH

Approximate Weight ----- 7.48bs. (3.4kg)

Cranking (by Tester) ----- 300Amperes

Cold Cranking (-18°C) ----- 160Amperes

Internal Resistance(at 1KHz) ----- Approx.9.8mΩ

Operating Temperature Range

Discharge ----- -22°F(-30°C) to 122°F(50°C)

Charge ----- 32°F(0°C) to 104°F(40°C)

Life Expectancy (Cycle Use)

60% depth of discharge ----- 250 cycles

30% depth of discharge ----- 400 cycles

Shelf Life (% of normal capacity at 68°F(20°C).....SOC% ocv)

1 months ----- 91% 12.78V


3 months ----- 89% 12.70V

6 months ----- 80% 12.5V


Warranty ----- 1 year

Case ----- ABS

Terminal Dimensions: (in./mm)

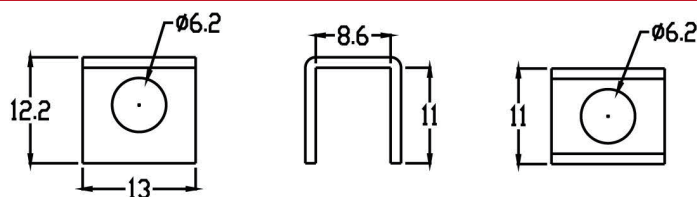

Physical Dimensions: (in./mm)

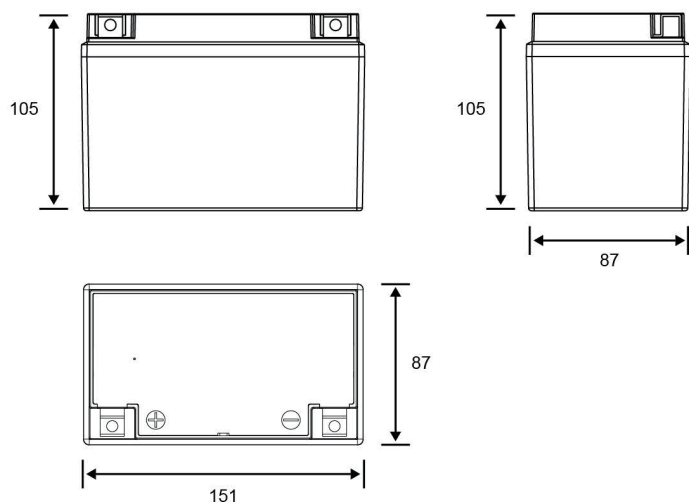


Length:5.94in(151mm) Width:3.43in(87mm)

Height:4.13in(105mm)


Tolerances are ± 0.04 inches (± 1 mm) and ± 0.08 inches (± 2 mm) for height.

Screws and nuts


Shelf life & Storage

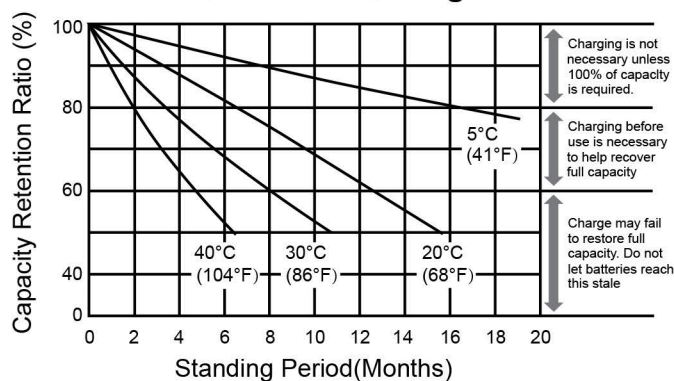


Discharge Characteristics

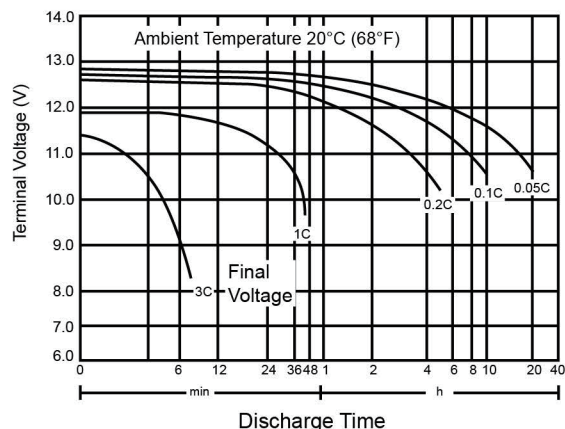

Discharge Time vs. Discharge Current

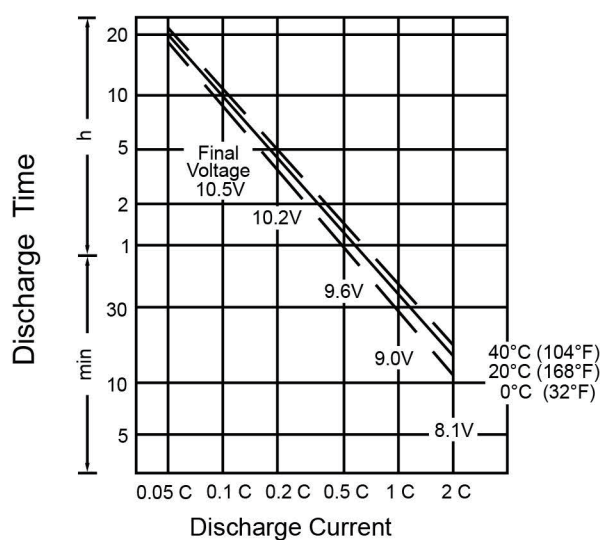

Life Characteristics in Cyclic Use

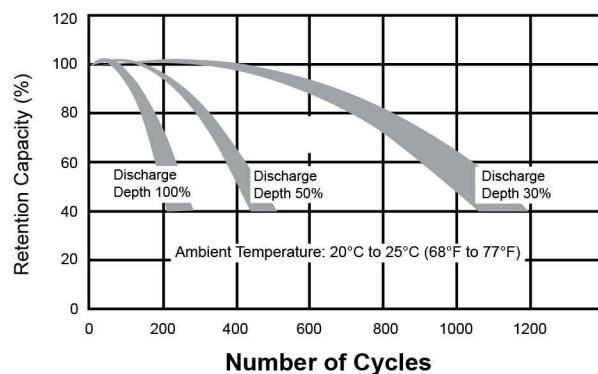

Charging

Cycle Applications: Limit initial current to 0.2C. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 50 mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Can be used to replace:

YT12A-BS	YTZ12S		