

Thank you for purchasing our Terni outdoor wall lighting equipment. The device is suitable for installation on outdoor walls as well as indoors. Please read these instructions carefully and heed the safety warnings and instructions before installing and using the device. This will ensure not only the protection of persons, but also the long-term viability of the equipment. Do not repair or modify the equipment, installation must only be carried out by a qualified technician. The operating temperature of the equipment is between -20°C and 50°C.


Technical parameters

	WO812
Power	220-240V AC
Consumption	12W
Luminous flux	560lm
Chromaticity	3000K
Colour rendering index Ra	>80
Degree of protection	IP 44
Dimensions	125 x 85 x 135 mm

Installation

Disconnect the power supply before installation!

1. Unscrew the side screws on the bottom and top of the device.
2. Remove the metal cover and slide the luminaire base plate out of the light-permeable cover.
3. Push the supply cable through the rubber hole in the base plate. (If the cable cannot be pushed through, make a thin hole in the rubber seal.)
4. Insert dowels into the pre-drilled holes and screw the base plate into the selected location.
5. Connect the supply cable to the terminal board and ensure that the connection is correct! (Refer to the terminal block for wiring markings)
6. Place the light-permeable cover on the base plate and then the metal cover.
7. Screw in the screws on the top and bottom of the unit.

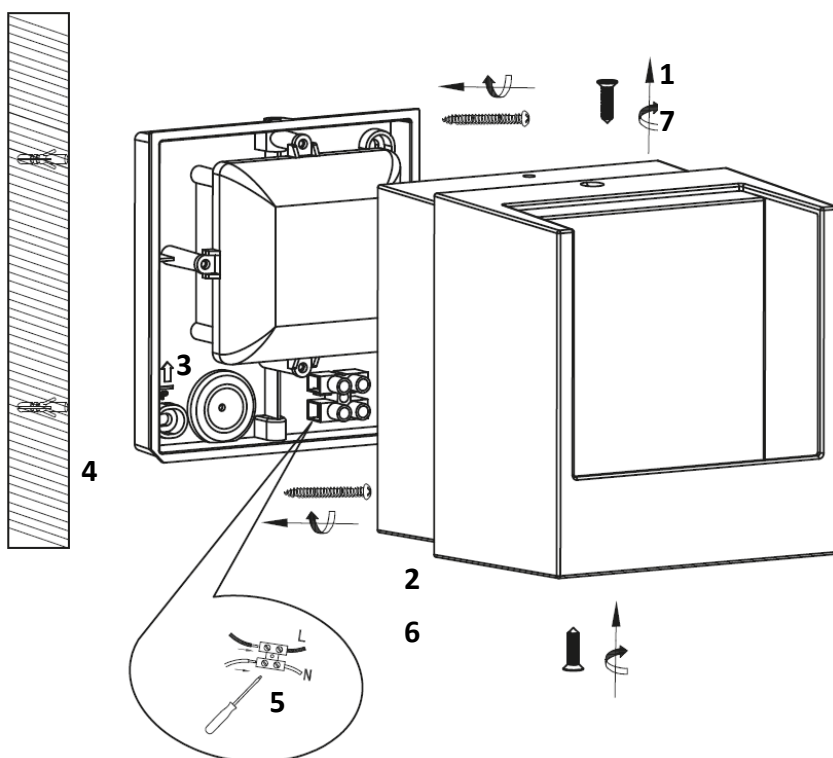

Safety warning

- Installation may only be carried out by a qualified worker.
- Do not cover the luminaire with anything or hang anything on it.
- Do not repair or modify the equipment in any way.

The light source of this luminaire is non-replaceable, at the end of its service life the entire luminaire must be replaced and disposed of in a designated place. This product contains a light source that for design reasons cannot be removed for verification and therefore the entire product is considered a light source.

